





Product characteristics

- Integrated Intel®i5-7360U/2.30GHz dual-core quad-thread processor
- 2*SODIMM DDR4 2133MHz memory, up to 32GB
- 1*HD OUTPUT1.4, 1*VGA, support dual display
- 2*Intel I211/I210 Gigabit network adapter, support network wake up, PXE functions
- 6*RS232 DB9 serial port, COM5~6 support RS232/485
- 4*USB3.0, 4*USB2.0
- DC 12V input
- fanless cooling structure, all aluminum alloy material

规格

Mod	C6850S-D6 V1.0(7360U)	
chassis	Material/Struct	All aluminum alloy without fan
	colour	Iron gray + fog silver
	Dimensions	L205*W191*H57mm
	Weight (bare	1.9 KG
	Install	Desktop/embedded
Main board	CPU	Integrated Intel®i5-7360U/2.30GHz dual-core quad-thread processor,
	reveal	Integrated Intel®Iris Plus Graphics 640, supports DirectX 12 OpenGL 4.5, supports 4K
	Internal	2*SODIMM memory slots, supporting 2133 DDR4 memory, up to 32GB
Front panel interface	POWER	1* Power switch,1* reset switch,1* AC LOSS (power on switch)
	USB	4 * USB2.0
	PS2	1*PS2
	COM	1*RS232/485 DB9 Serial port
	SIM	1*SIM card slot, 3G/4G module application
	LED	1* Power indicator, 1* hard disk indicator
Rear panel interface	Display	1*VGA, 1*HD OUTPUT1.4
	LAN	2*Intel® I211/I210 Gigabit network adapter, support network wake up,
	USB	4 * start
	COM	5*RS232 DB9 serial port, COM1/2 support 9pin live function, COM5
	Audio	1*Line out, 1* MIC
	Power source	1*DC 12V power port
store	SATA	1 x 2.5-inch hard disk
	Solid-state disk	1*MSATA, transmission speed up to 6Gbps
extend	Mini PCIE	1*Mini PCIE slot, supporting WIFI/4G module
	M.2	1*M.2/WiFi,Key-E,2230, support WiFi module (WiFi Bluetooth function)
Software support	Microsoft	Windows 7
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (256 level, 0~255 seconds)
Power demand	Power supply	External power adapter
	Voltage input	DC 12V
	Power output	60W~180W (depending on the device)
environment	Operating	-10°C to 50°C
	Storage	-20°C to 70°C
	Relative	5%-95% relative humidity, no condensation
	Working	0.5g rms/5-500HZ/random/operating

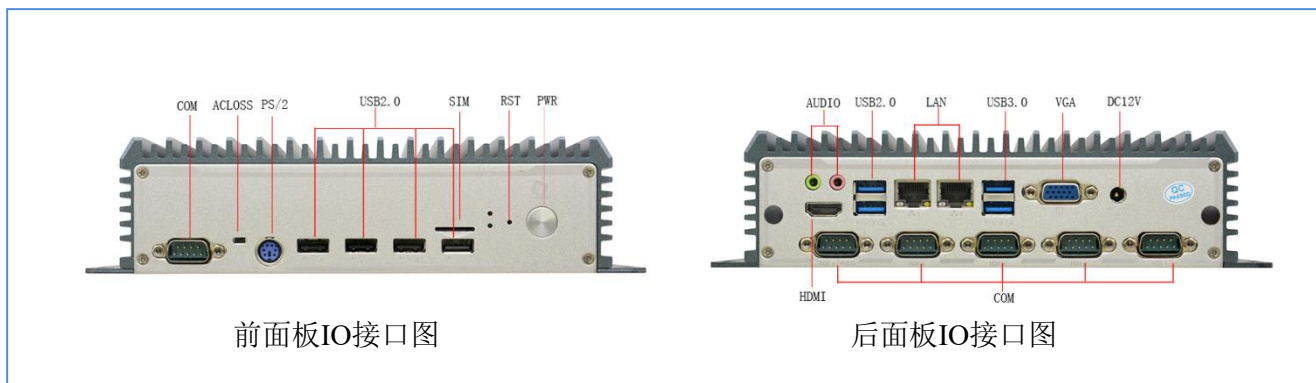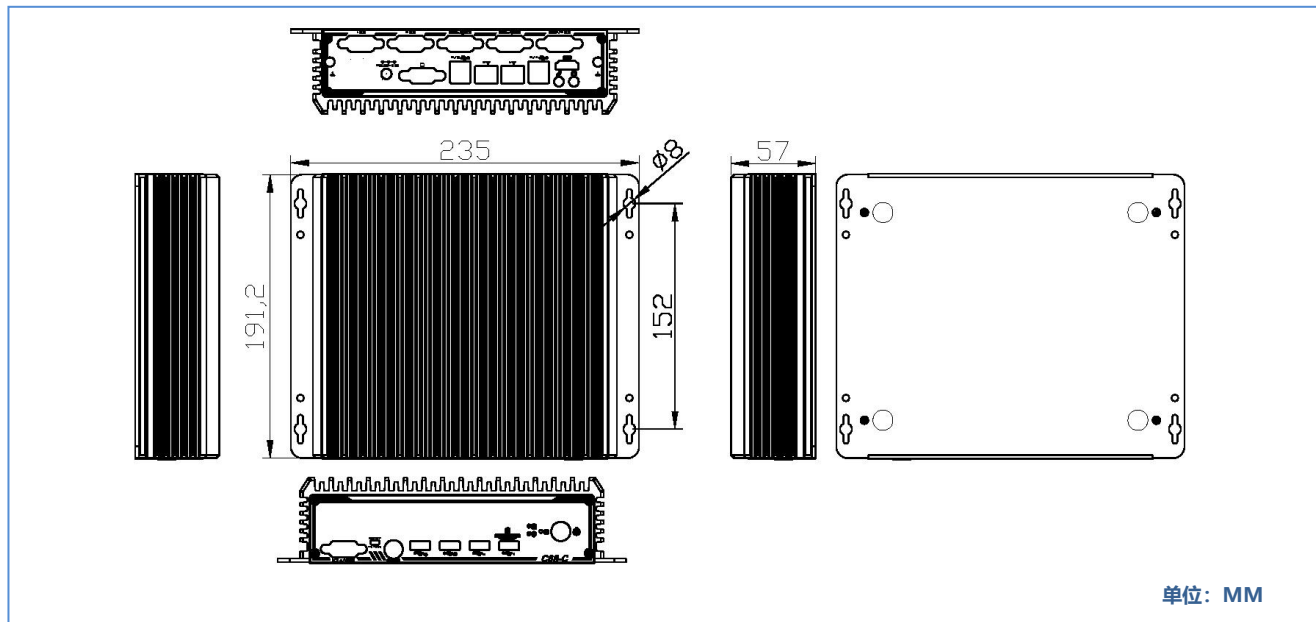

订货信息



研域
YENTEK

嵌入式工控机

所有产品规格变更，均不另行通知

No.	Model	CPU	Memory	Motherboard	IO Board	LAN	M.2	COM	HD OUTP	VGA	USB	power
1	C6850S-D6V1.0(J1900)	J1900/2.0GHz	1*SODDDR3L	C19_J926D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
2	C6850S-D6 V1.0(3865U)	3865U/1.8GHz	2*SODDDR4	C58_C326D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
3	C6850S-D6 V1.0(5205U)	5205U/1.9GHz	2*SODDDR4	C100_C326D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
4	C6850S-D6 V1.0(4300U)	i5-4300U/1.9GHz	2*SODDDR4	C100_C326D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
5	C6850S-D6 V1.0(5020U)	i3-5020U/2.2GHz	1*SODDDR3L	C43_I326D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
6	C6850S-D6 V1.0(6650U)	i7-6650U/2.2GHz	2*SODDDR4	C58-I726D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
7	C6850S-D6 V1.0(7200U)	i5-7200U/2.5GHz	2*SODDDR4	C58-I526D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
8	C6850S-D6 V1.0(7360U)	i5-7360U/2.3GHz	2*SODDDR4	C58-I526D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
9	C6850S-D6 V1.0(8145U)	i3-8145U/2.1GHz	2*SODDDR4	C81-I326D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
10	C6850S-D6 V1.0(8265U)	i5-8265U/1.6GHz	2*SODDDR4	C81-I526D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
11	C6850S-D6 V1.0(8565U)	i7-8565U/1.8GHz	2*SODDDR4	C81-I726D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
12	C6850S-D6 V1.0(10210U)	i5-10210U/1.6GHz	2*SODDDR4	C100-I526D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V
13	C6850S-D6 V1.0(1135G7)	i5-1135G7/2.4GHz	2*SODDDR4	C110-I526D	C69-D6/C68-HM/C68-DC	2	1	6	1	1	8	DC 12V

