




STX-N39_19 VER1.2A 规格表

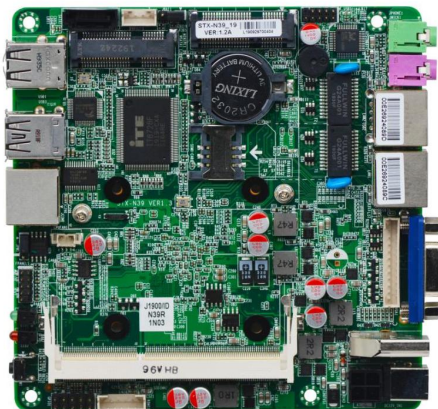


STX-N39_19 VER:1.2A 主板正面图



STX-N39_19 VER:1.2A 主板背面 IO 图



STX-N39_19 VER:1.2A 主板正面 IO 图

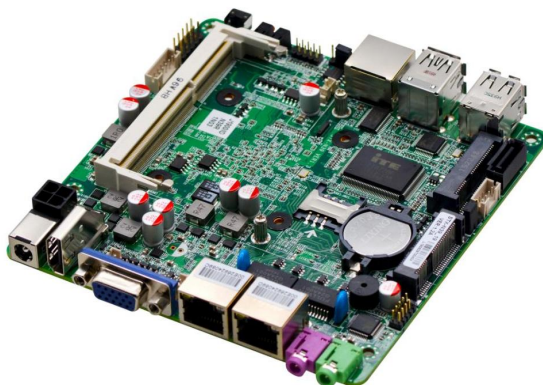

STX-N39_19 VER:1.2A 主板侧面图

Product number	STX-N39_19 VER:1.2A
processor	Integrated Intel®J1900/2.00GHz quad-core processor, TDP power consumption 10W
chipset	Based on Intel® Bay trail SOC platform
RAM	1*SO DDRIII slot, only supports 1600/1333MHz DDR3L/1.35V memory, maximum support 8GB
Show	Integrated Intel®HD Graphics core graphics 1*VGA, 1*HDMI interface Support VGA; HDMI synchronous/asynchronous display
The internet Store	2* RTL8111F Gigabit Ethernet chip, support Wake on LAN/PXE function 1* 7pin SATA2.0 hard disk interface, transfer rate up to 3Gbps 1* MSATA slot supports SSD/WIFI (default is SSD), SSD transmission speed up to 3Gbps
Audio	Onboard ALC662 6-channel high-fidelity audio controller, support MIC/Line-out
Expand Backplane I/O interface	1* Mini-PCIE slot supports WIFI/4G module 3* USB2.0 interface 1*USB3.0 interface, 1* HDMI port 1* VGA port 2* RJ45 Gigabit network interface 1* Line out (green), 1* MIC (purple) 1* CISCO standard COM interface 1* Power button 1* 12V DC JACK input 1* hard disk indicator, 1* power indicator
Built-in I/O interface	1* JVGA1 interface (1*12pin) same signal as DB15 2* USB2.0 interface (2*5pin, choose one from USB2) 1* PS/2 mouse keyboard interface (1*6Pin) 1* Hard disk power supply interface, 1*4pin 1* Front panel function button and indicator light interface (2*5pin) 1* SIM slot

1* 4pin ATX 12V input and output power interface

Fan interface	Support fanless cooling, reserved 1*3pin CPU fan interface
GPIO	Support 4 input and output GPIO
BIOS	AMI 64Mb Flash ROM
Watchdog operating system	Support hardware reset function (256 levels, 0~255 seconds) Windows 7/Windows 10/Linux
Power type	DC 12V single power input
Operating temperature	-10℃ ~ 60℃
Storage temperature	-20℃ ~ 70℃
Working humidity	5%-95% relative humidity, non-condensing
Size	120mm x 120mm

订购信息:

No.	Model	Processor	Frequency	Memory	VGA	HDMI	LVDS	LAN	USB	COM	RS485	Power
1	STX-N39 VER:1.2A	J1900	2.0G	1*SODDDR3L	1	1	X	1	6	1	X	DC/12V
2	STX-N39_19 VER:1.2A	J1900	2.0G	1*SODDDR3L	1	1	X	2	6	1	X	DC12V
3	STX-N39_05 VER:1.2A	N2805	1.46G	1*SODDDR3L	1	1	X	1	6	1	X	DC12V
4	STX-N39_18 VER:1.2A	J1800	2.41G	1*SODDDR3L	1	1	X	2	6	1	X	DC/12V

